

# Shenandoah Mutual Fire Insurance Company

## Woodstove Questionnaire

Insured's Name: \_\_\_\_\_

Policy No: \_\_\_\_\_

Inspected By: \_\_\_\_\_

Date: \_\_\_\_\_

1. Make: \_\_\_\_\_ Model: \_\_\_\_\_ Age: \_\_\_\_\_ Yrs. UL Label: ☐Yes ☐No

2. Stove type: ☐Free standing radiant ☐Fireplace insert

3. Installed by: ☐Owner ☐Contractor (Name): \_\_\_\_\_

4. Material used under stove: \_\_\_\_\_

5. Material used on wall nearest stove: \_\_\_\_\_

6. Room the stove is located: \_\_\_\_\_

7. Chimney type: ☐Standard masonry with flue liner ☐Nonstandard masonry ☐Triple walled metal  
☐U.L. approved metal ☐Other: \_\_\_\_\_

### For the following questions, provide further explanation when answering "No"

8. Is the stove is in good working condition:  
☐Yes ☐No: \_\_\_\_\_

9. Has the installation of the stove been inspected and complies with local ordinances:  
☐Yes ☐No: \_\_\_\_\_

10. Are there 2 or more bends in the flue pipe:  
☐Yes ☐No: \_\_\_\_\_

11. Is this the only heating appliance vented into this flue:  
☐Yes ☐No: \_\_\_\_\_

12. Are the chimney and stove pipes cleaned between each heating season:  
☐Yes ☐No: \_\_\_\_\_


13. Is this the primary source of heat in the building:  
☐Yes ☐No: \_\_\_\_\_

14. When removing ashes, are they placed into a metal container and immediately moved outside away from any structures:  
☐Yes ☐No: \_\_\_\_\_

15. Are all furniture and combustible materials at least 36 inches from the stove:  
☐Yes ☐No: \_\_\_\_\_

16. Has the insured ever had a chimney fire: ☐Yes ☐No: \_\_\_\_\_

Please measure and fill in the distances below:

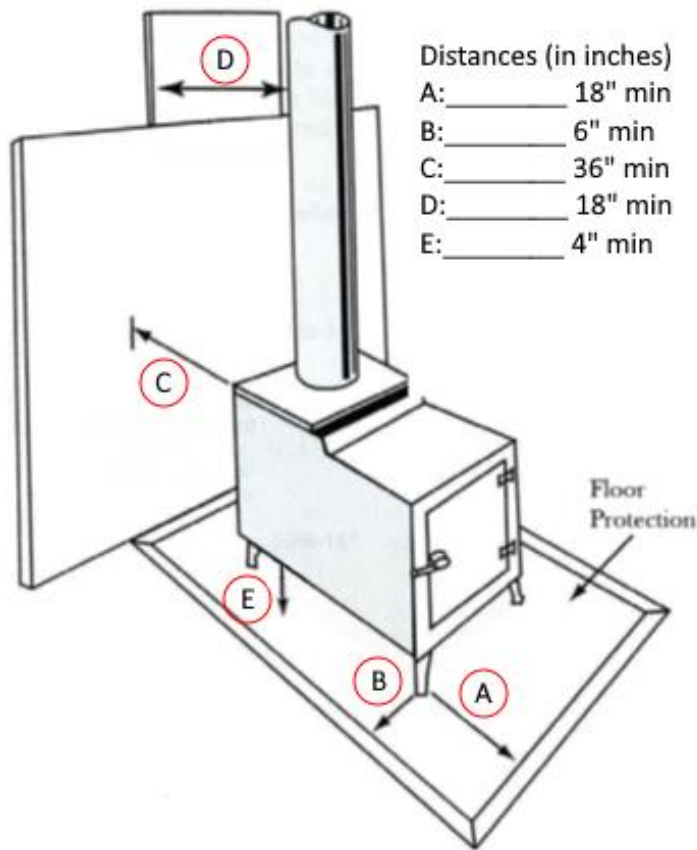

#### SMFIC Requirements

1. Stove legs allow at least 4" air gap below stove.
2. Stove must be on a non-combustible pad or surface that extends at least 18" beyond loading door and 6" beyond the side and rear.
3. Stove must be at least 36" away from combustible wall or furnishings, or 18" from non-combustible shield with 1" air space to combustible wall.
4. Chimney passes through non-combustible thimble collar or opening.
5. No more than 2 bends in chimney piping.
6. Only one heating source can be connected to a chimney.
7. Chimney pipe must be 18" from wall.

**Remember to include a photo of the woodstove when  
uploading photos of dwelling to Shenandoah Mutual**